


# ADAPTATEUR JIC X BSP

ADAPTATEUR DROIT FEMELLE TOURNANT JIC  
X FEMELLE TOURNANT BSP

## DONNÉES TECHNIQUES

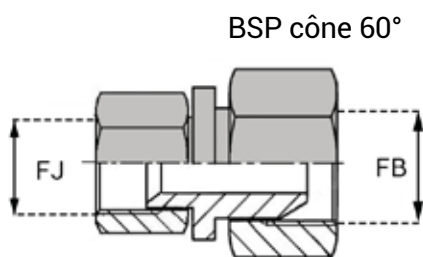

| Référence  | Désignation        | Ø FJ    |       | Ø FB |       |
|------------|--------------------|---------|-------|------|-------|
|            |                    | inch    | mm    | inch | mm    |
| JFFBSP0404 | FJ7/16 / FBSP1/4   | 7/16'   | 9,71  | 1/4' | 11,44 |
| JFFBSP0406 | FJ7/16 / FBSP3/8   | 7/16'   | 9,71  | 3/8' | 14,95 |
| JFFBSP0504 | FJ1/2 / FBSP1/4    | 1/2'    | 11,12 | 1/4' | 11,44 |
| JFFBSP0604 | FJ9/16 / FBSP1/4   | 9/16'   | 12,76 | 1/4' | 11,44 |
| JFFBSP0606 | FJ9/16 / FBSP3/8   | 9/16'   | 12,76 | 3/8' | 14,95 |
| JFFBSP0608 | FJ9/16 / FBSP1/2   | 9/16'   | 12,76 | 1/2' | 18,63 |
| JFFBSP0806 | FJ3/4 / FBSP3/8    | 3/4'    | 17,33 | 3/8' | 14,95 |
| JFFBSP0808 | FJ3/4 / FBSP1/2    | 3/4'    | 17,33 | 1/2' | 18,63 |
| JFFBSP0812 | FJ3/4 / FBSP3/4    | 3/4'    | 17,33 | 3/4' | 24,12 |
| JFFBSP1006 | FJ7/8 / FBSP3/8    | 7/8'    | 20,26 | 1/2' | 18,63 |
| JFFBSP1008 | FJ7/8 / FBSP1/2    | 7/8'    | 20,26 | 1"   | 30,29 |
| JFFBSP1010 | FJ7/8 / FBSP5/8    | 7/8'    | 20,26 | 5/8' | 21,72 |
| JFFBSP1208 | FJ1*1/16 / FBSP1/2 | 1*1/16' | 24,69 | 1/2' | 18,63 |
| JFFBSP1212 | FJ1*1/16 / FBSP3/4 | 1*1/16' | 24,69 | 3/4' | 24,12 |
| JFFBSP1616 | FJ1*5/16 / FBSP1"  | 1*5/16' | 31,04 | 1"   | 30,29 |

## PRODUITS SIMILAIRES

Cet adaptateur existe également avec extrémité femelle gaz cylindrique, mâle gaz cylindrique et mâle gaz conique.