


FAMILLE BSP X BSP

ADAPTATEUR DROIT MÂLE BSP X FEMELLE TOURNANT BSP

DONNÉES TECHNIQUES

Les extrémités BSP sont en cône 60°.

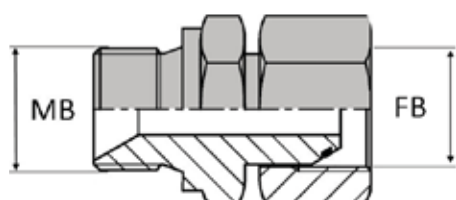

Référence	Désignation	Ø MB		Ø FB	
		inch	mm	inch	mm
BUMF000202	MBSPCT1/8 / FBSP1/8	1/8'	9,72	1/8'	8,56
BUMF000204	MBSPCT1/8 / FBSP1/4	1/4'	13,15	1/8'	8,56
BUMF000206	MBSPCT1/8 / FBSP3/8	3/8'	16,66	1/8'	8,56
BUMF000208	MBSPCT1/8 / FBSP1/2	1/2'	20,95	1/8'	8,56
BUMF000402	MBSPCT1/4 / FBSP1/8	1/8'	9,72	1/4'	11,44
BUMF000404	MBSPCT1/4 / FBSP1/4	1/4'	13,15	1/4'	11,44
BUMF000406	MBSPCT1/4 / FBSP3/8	3/8'	16,66	1/4'	11,44
BUMF000408	MBSPCT1/4 / FBSP1/2	1/2'	20,95	1/4'	11,44
BUMF000410	MBSPCT1/4 / FBSP5/8	5/8'	22,91	1/4'	11,44
BUMF000412	MBSPCT1/4 / FBSP3/4	3/4'	26,44	1/4'	11,44
BUMF000602	MBSPCT3/8 / FBSP1/8	1/8'	9,72	3/8'	14,95
BUMF000604	MBSPCT3/8 / FBSP1/4	1/4'	13,15	3/8'	14,95
BUMF000606	MBSPCT3/8 / FBSP3/8	3/8'	16,66	3/8'	14,95
BUMF000608	MBSPCT3/8 / FBSP1/2	1/2'	20,95	3/8'	14,95
BUMF000610	MBSPCT3/8 / FBSP5/8	5/8'	22,91	3/8'	14,95
BUMF000612	MBSPCT3/8 / FBSP3/4	3/4'	26,44	3/8'	14,95
BUMF000616	MBSPCT3/8 / FBSP1"	1"	33,24	3/8'	14,95
BUMF000620	MBSPCT3/8 / FBSP1*1/4	1*1/4'	41,91	3/8'	14,95
BUMF000802	MBSPCT1/2 / FBSP1/8	1/8'	9,72	1/2'	18,63
BUMF000804	MBSPCT1/2 / FBSP1/4	1/4'	13,15	1/2'	18,63
BUMF000806	MBSPCT1/2 / FBSP3/8	3/8'	16,66	1/2'	18,63
BUMF000808	MBSPCT1/2 / FBSP1/2	1/2'	20,95	1/2'	18,63

Référence	Désignation	Ø MB		Ø FB	
		inch	mm	inch	mm
BUMF000810	MBSPCT1/2 / FBSP5/8	5/8'	22,91	1/2'	18,63
BUMF000812	MBSPCT1/2 / FBSP3/4	3/4'	26,44	1/2'	18,63
BUMF000816	MBSPCT1/2 / FBSP1"	1"	33,24	1/2'	18,63
BUMF001002	MBSPCT5/8 / FBSP1/8	1/8'	9,72	5/8'	21,72
BUMF001004	MBSPCT5/8 / FBSP1/4	1/4'	13,15	5/8'	21,72
BUMF001006	MBSPCT5/8 / FBSP3/8	3/8'	16,66	5/8'	21,72
BUMF001008	MBSPCT5/8 / FBSP1/2	1/2'	20,95	5/8'	21,72
BUMF001010	MBSPCT5/8 / FBSP5/8	5/8'	22,91	5/8'	21,72
BUMF001012	MBSPCT5/8 / FBSP3/4	3/4'	26,44	5/8'	21,72
BUMF001016	MBSPCT5/8 / FBSP1"	1"	33,24	5/8'	21,72
BUMF001204	MBSPCT3/4 / FBSP1/4	1/4'	13,15	3/4'	24,12
BUMF001206	MBSPCT3/4 / FBSP3/8	3/8'	16,66	3/4'	24,12
BUMF001208	MBSPCT3/4 / FBSP1/2	1/2'	20,95	3/4'	24,12
BUMF001210	MBSPCT3/4 / FBSP5/8	5/8'	22,91	3/4'	24,12
BUMF001212	MBSPCT3/4 / FBSP3/4	3/4'	26,44	3/4'	24,12
BUMF001216	MBSPCT3/4 / FBSP1"	1"	33,24	3/4'	24,12
BUMF001604	MBSPCT1" / FBSP1/4	1/4'	13,15	1"	30,29
BUMF001606	MBSPCT1" / FBSP3/8	3/8'	16,66	1"	30,29
BUMF001608	MBSPCT1" / FBSP1/2	1/2'	20,95	1"	30,29
BUMF001610	MBSPCT1" / FBSP5/8	5/8'	22,91	1"	30,29
BUMF001612	MBSPCT1" / FBSP3/4	3/4'	26,44	1"	30,29
BUMF001616	MBSPCT1" / FBSP1"	1"	33,24	1"	30,29
BUMF001620	MBSPCT1" / FBSP1"1/4	1"1/4'	41,91	1"	30,29
BUMF001624	MBSPCT1" / FBSP1"1/2	1"1/2'	47,8	1"	30,29
BUMF002016	MBSPCT1"1/4 / FBSP1"	1"	33,24	1"1/4'	28,95
BUMF002020	MBSPCT1"1/4 / FBSP1"1/4	1"1/4'	41,91	1"1/4'	28,95
BUMF002024	MBSPCT1"1/4 / FBSP1"1/2	1"1/2'	47,8	1"1/4'	28,95
BUMF002416	MBSPCT1"1/2 / FBSP1"	1"	33,24	1"1/2'	44,84
BUMF002420	MBSPCT1"1/2 / FBSP1"1/4	1"1/4'	41,91	1"1/2'	44,84
BUMF002424	MBSPCT1"1/2 / FBSP1"1/2	1"1/2'	47,8	1"1/2'	44,84
BUMF002432	MBSPCT1"1/2 / FBSP2"	2"	59,61	1"1/2'	44,84
BUMF003220	MBSPCT2" / FBSP1"1/4	1"1/4'	41,91	2"	56,65
BUMF003224	MBSPCT2" / FBSP1"1/2	1"1/2'	47,8	2"	56,65
BUMF003232	MBSPCT2" / FBSP2"	2"	59,61	2"	56,65

PRODUITS SIMILAIRES

Cet adaptateur existe également avec une extrémité mâle BSP et mâle cloison BSP.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)