

BRIDES & COLLETS



BRIDES D'OBTURATION MONOBLOCS

SAE 3000



DONNÉES TECHNIQUES

+ joint
oring et
vis

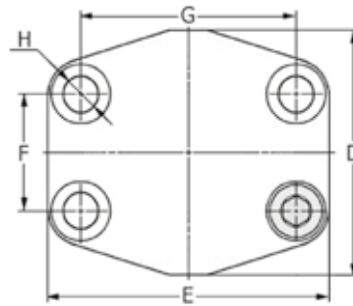

Référence	DN	C	D	E	F	G	H	I
ABMOBE3008	1/2"	16	48	56	17.48	38.10	9	M 08X30
ABMOBE3012	3/4"	16	50	65	22.23	47.63	11	M 10X30
ABMOBE3016	1"	19	60	70	26.19	52.37	11	M 10X35
ABMOBE3020	1"1/4	18	68	79	30.18	58.72	11.5	M 10X35
ABMOBE3024	1"1/2	20	78	93	35.71	69.85	13.5	M 12X40
ABMOBE3032	2"	20	90	102	42.88	77.77	13.5	M 12X40
ABMOBE3040	2"1/2	20	105	114	50.80	88.90	13.5	M 12X40
ABMOBE3048	3"	24	124	134	61.93	106.38	17.5	M 16X50
ABMOBE3056	3"1/2	22	136	152	69.85	120.65	17.5	M 16X50
ABMOBE3064	4"	25	146	162	77.77	130.18	17.5	M 16X50
ABMOBE3080	5"	28	170	190	92.08	152.40	17.5	M 16X50

PRODUITS SIMILAIRES

Dans cette famille existe également les brides en SAE 6000.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)