

EMBOUTS INTERLOCK


JIC

EMBOUT FEMELLE DROIT



DONNÉES TECHNIQUES

Filetage UNF - cône 74°

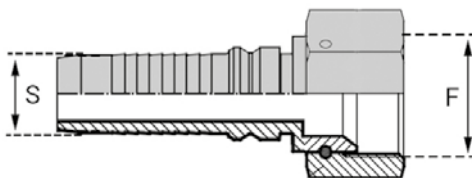

Référence	Désignation	S (int. tuyaux)			Dimensions			
		module	inch	mm	filetage	F/p	pas	D.I
IFJI001012	IN 16 FJI 1"1/16 DKJ	10	5/8"	15,9	1"1/16	12	2,116	24,69
IFJI001212	IN 19 FJI 1"1/16 DKJ	12	3/4"	19	1"1/16	12	2,116	24,69
IFJI001214	IN 19 FJI 1"3/16 DKJ	12	3/4"	19	1"3/16	12	2,116	27,87
IFJI001216	IN 19 FJI 1"5/16 DKJ	12	3/4"	19	1"5/16	12	2,116	31,04
IFJI001616	IN 25 FJI 1"5/16 DKJ	16	1"	25,4	1"5/16	12	2,116	31,04
IFJI001620	IN 25 FJI 1"5/8 DKJ	16	1"	25,4	1"5/8	12	2,116	38,98
IFJI002020	IN 32 FJI 1"5/8 DKJ	20	1"1/4	31,8	1"5/8	12	2,116	38,98
IFJI002024	IN 32 FJI 1"7/8 DKJ	20	1"1/4	31,8	1"7/8	12	2,116	45,33
IFJI002424	IN 38 FJI 1"7/8 DKJ	24	1"1/2	38,1	1"7/8	12	2,116	45,33
IFJI003232	IN 50 FJI 2"1/2 DKJ	32	2"	50,8	2"1/2	12	2,116	61,2

PRODUITS SIMILAIRES

Cet embout existe également en mâle droit ou femelle coudé 45°, 90° et 90° courbe haute.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)