


EMBOUTS ORFS

EMBOUT FEMELLE DROIT



DONNÉES TECHNIQUES

Filetage UNF - Joint facial

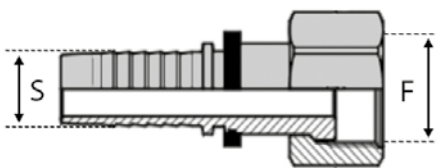

Référence	Désignation	S (int. tuyaux)			F	
		module	inch	mm	inch	mm
SFORF00404	S 06 FORFS 9/16	4	1/4"	6,35	9/16	12,75
SFORF00406	S 06 FORFS 11/16	4	1/4"	6,35	11/16	15,73
SFORF00408	S 06 FORFS 13/16	4	1/4"	6,35	13/16	18,9
SFORF00506	S 08 FORFS 11/16	5	5/16"	8	11/16	15,73
SFORFS00604	S 10 FORFS 9/16	6	3/8"	9,5	9/16	12,75
SFORF00606	S 10 FORFS 11/16	6	3/8"	9,5	11/16	15,73
SFORF00608	S 10 FORFS 13/16	6	3/8"	9,5	13/16	18,9
SFORF00610	S 10 FORFS 1"	6	3/8"	9,5	1"	23,45
SFORF00806	S 13 FORFS 11/16	8	1/2"	12,7	11/16	15,73
SFORF00808	S 13 FORFS 13/16	8	1/2"	12,7	13/16	18,9
SFORF00810	S 13 FORFS 1"	8	1/2"	12,7	1"	23,45
SFORF00812	S 13 FORFS 1*3/16	8	1/2"	12,7	1*3/16	27,87
SFORF01008	S 16 FORFS 13/16	10	5/8"	15,9	13/16	18,9
SFORF01010	S 16 FORFS 1"	10	5/8"	15,9	1"	23,45
SFORF01012	S 16 FORFS 1*3/16	10	5/8"	15,9	1*3/16	27,87
SFORF01210	S 19 FORFS 1"	12	3/4"	19	1"	23,45
SFORF01212	S 19 FORFS 1*3/16	12	3/4"	19	1*3/16	27,87
SFORF01216	S 19 FORFS 1*7/16	12	3/4"	19	1*7/16	34,22
SFORF01612	S 25 FORFS 1*3/16	16	1"	25,4	1*3/16	27,87
SFORF01616	S 25 FORFS 1*7/16	16	1"	25,4	1*7/16	34,22
SFORF01620	S 25 FORFS 1*11/16	16	1"	25,4	1*11/16	40,57
SFORF02020	S 32 FORFS 1*11/16	20	1*1/4	31,8	1*11/16	40,57
SFORF02024	S 32 FORFS 2"	20	1*1/4	31,8	2"	48,51
SFORF02424	S 38 FORFS 2"	24	1*1/2	38,1	2"	48,51

PRODUITS SIMILAIRES

Cet embout existe également en mâle droit ou femelle coudé 45°, 90° et 90° courbe haute.