


EMBOUTS ORFS

EMBOUT FEMELLE COUDÉ 90°



DONNÉES TECHNIQUES

Filetage UNF - Joint facial

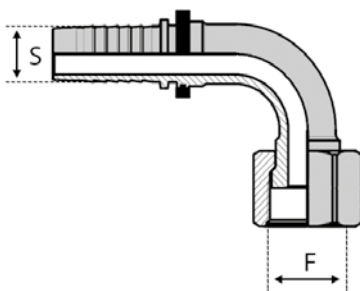

Référence	Désignation	S (int. tuyaux)			F	
		module	inch	mm	inch	mm
SFORF90404	S 06 FORFS 9/16 90	4	1/4"	6,35	9/16	12,75
SFORF90406	S 06 FORFS 11/16 90	4	1/4"	6,35	11/16	15,73
SFORF90408	S 06 FORFS 13/16 90	4	1/4"	6,35	13/16	18,9
SFORF90506	S 08 FORFS 11/16 90	5	5/16"	8	11/16	15,73
SFORF90606	S 10 FORFS 11/16 90	6	3/8"	9,5	11/16	15,73
SFORF90608	S 10 FORFS 13/16 90	6	3/8"	9,5	13/16	18,9
SFORF90806	S 13 FORFS 11/16 90	8	1/2"	12,7	11/16	15,73
SFORF90808	S 13 FORFS 13/16 90	8	1/2"	12,7	13/16	18,9
SFORF90810	S 13 FORFS 1" 90	8	1/2"	12,7	1"	23,45
SFORF90812	S 13 FORFS 1*3/16 90	8	1/2"	12,7	1*3/16	27,87
SFORF91008	S 16 FORFS 13/16 90	10	5/8"	15,9	13/16	18,9
SFORF91010	S 16 FORFS 1" 90	10	5/8"	15,9	1"	23,45
SFORF91012	S 16 FORFS 1*3/16 90	10	5/8"	15,9	1*3/16	27,87
SFORF91210	S 19 FORFS 1" 90	12	3/4"	19	1"	23,45
SFORF91212	S 19 FORFS 1*3/16 90	12	3/4"	19	1*3/16	27,87
SFORF91216	S 19 FORFS 1*7/16 90	12	3/4"	19	1*7/16	34,22
SFORF91612	S 25 FORFS 1*3/16 90	16	1"	25,4	1*3/16	27,87
SFORF91616	S 25 FORFS 1*7/16 90	16	1"	25,4	1*7/16	34,22
SFORF91620	S 25 FORFS 1*11/16 90	16	1"	25,4	1*11/16	40,57
SFORF92020	S 32 FORFS 1*11/16 90	20	1*1/4	31,8	1*11/16	40,57
SFORF92024	S 32 FORFS 2" 90	20	1*1/4	31,8	2"	48,51
SFORF92424	S 38 FORFS 2" 90	24	1*1/2	38,1	2"	48,51

PRODUITS SIMILAIRES

Cet embout existe également en mâle droit ou femelle droit et coudé 45° et 90° courbe haute.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)