


# EMBOUTS ORFS

## EMBOUT FEMELLE COUDÉ 90° COURBE HAUTE



### DONNÉES TECHNIQUES

Filetage UNF - Joint facial

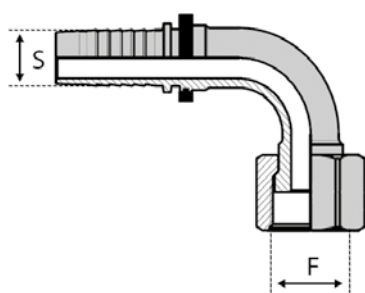

Référence	Désignation	S ( int. tuyaux)			F	
		module	inch	mm	inch	mm
SFORF90404-H045	S 06 FORFS 9/16 90 - H45,5MM	4	1/4"	6,35	9/16	12,75
SFORF90606-H053	S 10 FORFS 11/16 90 - H53,5MM	6	3/8"	9,5	11/16	15,73
SFORF90608-H053	S 10 FORFS 13/16 90 - H53,5MM	6	3/8"	9,5	13/16	18,9
SFORF90808-H063	S 13 FORFS 13/16 90 - H63,5MM	8	1/2"	12,7	13/16	18,9
SFORF90810-H064	S 13 FORFS 1" 90 - H64MM	8	1/2"	12,7	1"	23,45
SFORF91010-H069	S 16 FORFS 1" 90 - H69MM	10	5/8"	15,9	1"	23,45
SFORF91012-H073	S 16 FORFS 1"3/16 90 - H73MM	10	5/8"	15,9	1"3/16	27,87
SFORF91212-H096	S 19 FORFS 1"3/16 90 - H96MM	12	3/4"	19	1"3/16	27,87
SFORF91616-H113	S 25 FORFS 1"7/16 90 - H113,5MM	16	1"	25,4	1"7/16	34,22

### PRODUITS SIMILAIRES

Cet embout existe également en mâle droit ou femelle droit et coudé 45° et 90°.