


# EMBOUTS CYLINDRIQUE BSPP

## EMBOUT FEMELLE COUDÉ 90°



### DONNÉES TECHNIQUES

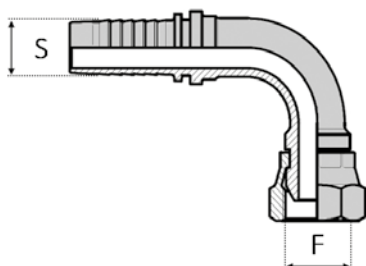

Cône 60° - Filetage Whitworth

Référence	Désignation	S ( int. tuyaux)			F	
		module	inch	mm	inch	mm
SFBSP90302	S 04 FBSP 1/8 90	3	3/16"	4,8	1/8-(05X10)	8,56
SFBSP90304	S 04 FBSP 1/4 90	3	3/16"	4,8	1/4-(08X13)	11,44
SFBSP90402	S 06 FBSP 1/8 90	4	1/4"	6,35	1/8-(05X10)	8,56
SFBSP90404	S 06 FBSP 1/4 90	4	1/4"	6,35	1/4-(08X13)	11,44
SFBSP90406	S 06 FBSP 3/8 90	4	1/4"	6,35	3/8-(12X17)	14,95
SFBSP90408	S 06 FBSP 1/2 90	4	1/4"	6,35	1/2-(15X21)	18,63
SFBSP90504	S 08 FBSP 1/4 90	5	5/16"	8	1/4-(08X13)	11,44
SFBSP90506	S 08 FBSP 3/8 90	5	5/16"	8	3/8-(12X17)	14,95
SFBSP90508	S 08 FBSP 1/2 90	5	5/16"	8	1/2-(15X21)	18,63
SFBSP90604	S 10 FBSP 1/4 90	6	3/8"	9,5	1/4-(08X13)	11,44
SFBSP90606	S 10 FBSP 3/8 90	6	3/8"	9,5	3/8-(12X17)	14,95
SFBSP90608	S 10 FBSP 1/2 90	6	3/8"	9,5	1/2-(15X21)	18,63
SFBSP90806	S 13 FBSP 3/8 90	8	1/2"	12,7	3/8-(12X17)	14,95
SFBSP90808	S 13 FBSP 1/2 90	8	1/2"	12,7	1/2-(15X21)	18,63
SFBSP90810	S 13 FBSP 5/8 90	8	1/2"	12,7	5/8-(16X23)	21,72
SFBSP90812	S 13 FBSP 3/4 90	8	1/2"	12,7	3/4-(21X27)	24,12
SFBSP91008	S 16 FBSP 1/2 90	10	5/8"	15,9	1/2-(15X21)	18,63
SFBSP91010	S 16 FBSP 5/8 90	10	5/8"	15,9	5/8-(16X23)	21,72
SFBSP91012	S 16 FBSP 3/4 90	10	5/8"	15,9	3/4-(21X27)	24,12
SFBSP91208	S 19 FBSP 1/2 90	12	3/4"	19	1/2-(15X21)	18,63
SFBSP91210	S 19 FBSP 5/8 90	12	3/4"	19	5/8-(16X23)	21,72
SFBSP91212	S 19 FBSP 3/4 90	12	3/4"	19	3/4-(21X27)	24,12
SFBSP91216	S 19 FBSP 1" 90	12	3/4"	19	1"-(26X34)	30,29
SFBSP91612	S 25 FBSP 3/4 90	16	1"	25,4	3/4-(21X27)	24,12
SFBSP91616	S 25 FBSP 1" 90	16	1"	25,4	1"-(26X34)	30,29
SFBSP91620	S 25 FBSP 1"1/4 90	16	1"	25,4	1"1/4-(33X42)	38,95
SFBSP92020	S 32 FBSP 1"1/4 90	20	1"1/4	31,8	1"1/4-(33X42)	38,95
SFBSP92024	S 32 FBSP 1"1/2 90	20	1"1/4	31,8	1"1/2-(40X49)	44,84
SFBSP92424	S 38 FBSP 1"1/2 90	24	1"1/2	38,1	1"1/2-(40X49)	44,84
SFBSP92432	S 38 FBSP 2" 90	24	1"1/2	38,1	2"-(50X60)	56,65
SFBSP93232	S 50 FBSP 2" 90	32	2"	50,8	2"-(50X60)	56,65

### PRODUITS SIMILAIRES

Cet embout existe également en mâle droit, femelle droit ou coudé 45° et 90° compact.