


# EMBOUTS CYLINDRIQUE BSPP

## EMBOUT MÂLE DROIT



### DONNÉES TECHNIQUES

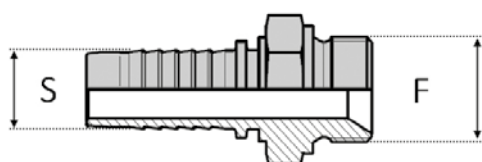

Cône 60° - Filetage Whitworth

Référence	Désignation	S ( int. tuyaux)			F	
		module	inch	mm	inch	mm
SMBSP00302	S 04 MBSPCT 1/8	3	3/16"	4,8	1/8-(05X10)	9,72
SMBSP00304	S 04 MBSPCT 1/4	3	3/16"	4,8	1/4-(08X13)	13,15
SMBSP00402	S 06 MBSPCT 1/8	4	1/4"	6,35	1/8-(05X10)	9,72
SMBSP00404	S 06 MBSPCT 1/4	4	1/4"	6,35	1/4-(08X13)	13,15
SMBSP00406	S 06 MBSPCT 3/8	4	1/4"	6,35	3/8-(12X17)	16,66
SMBSP00408	S 06 MBSPCT 1/2	4	1/4"	6,35	1/2-(15X21)	20,95
SMBSP00504	S 08 MBSPCT 1/4	5	5/16"	8	1/4-(08X13)	13,15
SMBSP00506	S 08 MBSPCT 3/8	5	5/16"	8	3/8-(12X17)	16,66
SMBSP00508	S 08 MBSPCT 1/2	5	5/16"	8	1/2-(15X21)	20,95
SMBSP00604	S 10 MBSPCT 1/4	6	3/8"	9,5	1/4-(08X13)	13,15
SMBSP00606	S 10 MBSPCT 3/8	6	3/8"	9,5	3/8-(12X17)	16,66
SMBSP00608	S 10 MBSPCT 1/2	6	3/8"	9,5	1/2-(15X21)	20,95
SMBSP00804	S 13 MBSPCT 1/4	8	1/2"	12,7	1/4-(08X13)	13,15
SMBSP00806	S 13 MBSPCT 3/8	8	1/2"	12,7	3/8-(12X17)	16,66
SMBSP00808	S 13 MBSPCT 1/2	8	1/2"	12,7	1/2-(15X21)	20,95
SMBSP00810	S 13 MBSPCT 5/8	8	1/2"	12,7	5/8-(16X23)	22,91
SMBSP00812	S 13 MBSPCT 3/4	8	1/2"	12,7	3/4-(21X27)	26,44
SMBSP01008	S 16 MBSPCT 1/2	10	5/8"	15,9	1/2-(15X21)	20,95
SMBSP01010	S 16 MBSPCT 5/8	10	5/8"	15,9	5/8-(16X23)	22,91
SMBSP01012	S 16 MBSPCT 3/4	10	5/8"	15,9	3/4-(21X27)	26,44
SMBSP01208	S 19 MBSPCT 1/2	12	3/4"	19	1/2-(15X21)	20,95
SMBSP01210	S 19 MBSPCT 5/8	12	3/4"	19	5/8-(16X23)	22,91
SMBSP01212	S 19 MBSPCT 3/4	12	3/4"	19	3/4-(21X27)	26,44
SMBSP01216	S 19 MBSPCT 1"	12	3/4"	19	1"-(26X34)	33,24
SMBSP01612	S 25 MBSPCT 3/4	16	1"	25,4	3/4-(21X27)	26,44
SMBSP01616	S 25 MBSPCT 1"	16	1"	25,4	1"-(26X34)	33,24
SMBSP01620	S 25 MBSPCT 1 1/4	16	1"	25,4	1 1/4-(33X42)	41,91
SMBSP02020	S 32 MBSPCT 1 1/4	20	1 1/4	31,8	1 1/4-(33X42)	41,91
SMBSP02024	S 32 MBSPCT 1 1/2	20	1 1/4	31,8	1 1/2-(40X49)	48,8
SMBSP02424	S 38 MBSPCT 1 1/2	24	1 1/2	38,1	1 1/2-(40X49)	48,8
SMBSP02432	S 38 MBSPCT 2"	24	1 1/2	38,1	2"-(50X60)	59,61
SMBSP03232	S 50 MBSPCT 2"	32	2"	50,8	2"-(50X60)	59,61

### PRODUITS SIMILAIRES

Cet embout existe également en femelle droit, coudé 45°, 90° ou 90° compact.

[www.isoflex.fr](http://www.isoflex.fr)

Tel : +33(0)2 41 39 98 98 - [contact@isoflex.fr](mailto:contact@isoflex.fr)

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)