

GASOIL - CARBURANT


TUYAU CARBURANT

CAOUTCHOUC ET TRESSE MÉTALLIQUE GALVANISÉE




DONNÉES TECHNIQUES

Utilisation : huile moteur, huile végétale, gasoil, fuel, eau, glycols



- 35°C / + 80°C

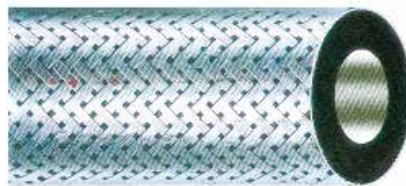

	Référence	ID (mm)	OD (mm)	WP (bar)	BR/r (mm)	
AU ML	AGTMG00005	4,5	9,5	20	25	
	AGTMG00006	5,5	10,5	20	30	
	AGTMG00008	7,5	12,5	15	40	
	AGTMG00010	9	14	15	45	
	AGTMG00012	11	17,7	15	50	
	AGTMG00015	14	21,2	15	65	
	AGTMG00018	17	24	15	80	
	AGTMG00022	21,5	30	15	95	
	AGTMG00025	25	35,8	15	150	
DÉVIDOIR						Longueur (ml)
	AGTMG00005-D20	4,5	9,5	20	25	20
	AGTMG00006-D20	5,5	10,5	20	30	20
	AGTMG00008-D15	7,5	12,5	15	40	15
	AGTMG00010-D10	9	14	15	45	10