


# ADAPTATEUR JIC X BSP

## ADAPTATEUR FEMELLE JIC X MÂLE BSP

### DONNÉES TECHNIQUES

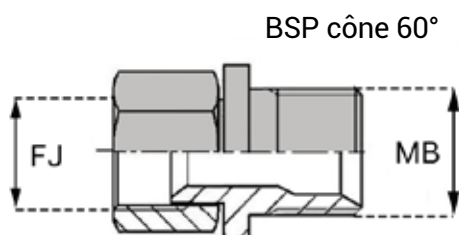

Référence	Désignation	Ø FJ		Ø MB	
		inch	mm	inch	mm
JFMBSP0402	FJ7/16 / MBSPCT1/8	7/16'	9,71	1/8'	9,72
JFMBSP0404	FJ7/16 / MBSPCT1/4	7/16'	9,71	1/4'	13,15
JFMBSP0504	FJ1/2 / MBSPCT1/4	1/2'	11,12	1/4'	13,15
JFMBSP0604	FJ9/16 / MBSPCT1/4	9/16'	12,76	1/4'	13,15
JFMBSP0606	FJ9/16 / MBSPCT3/8	9/16'	12,76	3/8'	16,66
JFMBSP0608	FJ9/16 / MBSPCT1/2	9/16'	12,76	1/2'	20,95
JFMBSP0804	FJ3/4 / MBSPCT1/4	3/4'	17,33	1/4'	13,15
JFMBSP0806	FJ3/4 / MBSPCT3/8	3/4'	17,33	3/8'	16,66
JFMBSP0808	FJ3/4 / MBSPCT1/2	3/4'	17,33	1/2'	20,95
JFMBSP0812	FJ3/4 / MBSPCT3/4	3/4'	17,33	3/4'	26,44
JFMBSP1006	FJ7/8 / MBSPCT3/8	7/8'	20,26	3/8'	16,66
JFMBSP1008	FJ7/8 / MBSPCT1/2	7/8'	20,26	1/2'	20,95
JFMBSP1012	FJ7/8 / MBSPCT3/4	7/8'	20,26	3/4'	26,44
JFMBSP1210	FJ1*1/16 / MBSPCT5/8	1*1/16'	24,69	5/8'	22,91
JFMBSP1212	FJ1*1/16 / MBSPCT3/4	1*1/16'	24,69	3/4'	26,44
JFMBSP1612	FJ1*5/16 / MBSPCT3/4	1*5/16'	31,04	3/4'	26,44
JFMBSP1616	FJ1*5/16 / MBSPCT1"	1*5/16'	31,04	1"	33,24
JFMBSP2020	FJ1*5/8 / MBSPCT1*1/4	1*5/8'	38,98	1*1/4'	41,91
JFMBSP2424	FJ1*7/8 / MBSPCT1*1/2	1*7/8'	45,33	1*1/2'	47,8
JFMBSP3232	FJ2*1/2 / MBSPCT2"	2*1/2'	61,2	2"	59,61