


ADAPTATEUR JIC X BSP

ADAPTATEUR DROIT FEMELLE TOURNANT JIC X MÂLE GAZ CONIQUE

DONNÉES TECHNIQUES

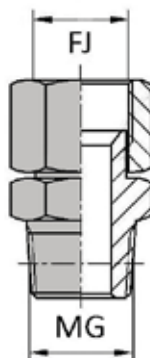

Référence	Désignation	Ø FJ		Ø MG	
		inch	mm	inch	mm
JFMC000402	FJ7/16 / MGC01/8	7/16'	9,71	1/8'	9,72
JFMC000404	FJ7/16 / MGC01/4	7/16'	9,71	1/4'	13,15
JFMC000502	FJ1/2 / MGC01/8	1/2'	11,12	1/8'	9,72
JFMC000504	FJ1/2 / MGC01/4	1/2'	11,12	1/4'	13,15
JFMC000506	FJ1/2 / MGC03/8	1/2'	11,12	3/8'	16,66
JFMC000604	FJ9/16 / MGC01/4	9/16'	12,76	1/4'	13,15
JFMC000606	FJ9/16 / MGC03/8	9/16'	12,76	3/8'	16,66
JFMC000608	FJ9/16 / MGC01/2	9/16'	12,76	1/2'	20,95
JFMC000804	FJ3/4 / MGC01/4	3/4'	17,33	1/4'	13,15
JFMC000806	FJ3/4 / MGC03/8	3/4'	17,33	3/8'	16,66
JFMC000808	FJ3/4 / MGC01/2	3/4'	17,33	1/2'	20,95
JFMC000812	FJ3/4 / MGC03/4	3/4'	17,33	3/4'	26,44
JFMC001006	FJ7/8 / MGC03/8	7/8'	20,26	3/8'	16,66
JFMC001008	FJ7/8 / MGC01/2	7/8'	20,26	1/2'	20,95
JFMC001012	FJ7/8 / MGC03/4	7/8'	20,26	3/4'	26,44
JFMC001208	FJ1*1/16 / MGC01/2	1*1/16'	24,69	1/2'	20,95
JFMC001212	FJ1*1/16 / MGC03/4	1*1/16'	24,69	3/4'	26,44
JFMC001216	FJ1*1/16 / MGC01"	1*1/16'	24,69	1"	33,24
JFMC001612	FJ1*5/16 / MGC03/4	1*5/16'	31,04	3/4'	26,44
JFMC001616	FJ1*5/16 / MGC01"	1*5/16'	31,04	1"	33,24
JFMC002016	FJ1*5/8 / MGC01"	1*5/8'	38,98	1"	33,24
JFMC002020	FJ1*5/8 / MGC01*1/4	1*5/8'	38,98	1*1/4'	41,91
JFMC002424	FJ1*7/8 / MGC01*1/2	1*7/8'	45,33	1*1/2'	47,8

PRODUITS SIMILAIRES

Cet adaptateur existe également avec extrémité femelle gaz cylindrique, mâle gaz cylindrique et femelle tournant BSP.