


ADAPTATEUR JIC X BSP

ADAPTATEUR DROIT MÂLE JIC X MÂLE BSP

DONNÉES TECHNIQUES

BSP cône 60° pour bague BS.

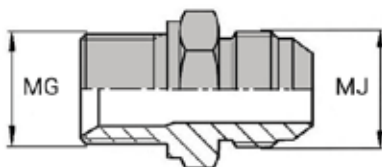

Référence	Désignation	Ø MJ		Ø MB	
		inch	mm	inch	mm
JMMBSP0304	MJ3/8 / MBSPCT1/4	3/8'	9,5	1/4'	13,15
JMMBSP0402	MJ7/16 / MBSPCT1/8	7/16'	11,11	1/8'	9,72
JMMBSP0404	MJ7/16 / MBSPCT1/4	7/16'	11,11	1/4'	13,15
JMMBSP0406	MJ7/16 / MBSPCT3/8	7/16'	11,11	3/8'	16,66
JMMBSP0408	MJ7/16 / MBSPCT1/2	7/16'	11,11	1/2'	20,95
JMMBSP0502	MJ1/2 / MBSPCT1/8	1/2'	12,7	1/8'	9,72
JMMBSP0504	MJ1/2 / MBSPCT1/4	1/2'	12,7	1/4'	13,15
JMMBSP0506	MJ1/2 / MBSPCT3/8	1/2'	12,7	3/8'	16,66
JMMBSP0508	MJ1/2 / MBSPCT1/2	1/2'	12,7	1/2'	20,95
JMMBSP0602	MJ9/16 / MBSPCT1/8	9/16'	14,28	1/8'	9,72
JMMBSP0604	MJ9/16 / MBSPCT1/4	9/16'	14,28	1/4'	13,15
JMMBSP0606	MJ9/16 / MBSPCT3/8	9/16'	14,28	3/8'	16,66
JMMBSP0608	MJ9/16 / MBSPCT1/2	9/16'	14,28	1/2'	20,95
JMMBSP0612	MJ9/16 / MBSPCT3/4	9/16'	14,28	3/4'	26,44
JMMBSP0804	MJ3/4 / MBSPCT 1/4	3/4'	19,05	1/4'	13,15
JMMBSP0806	MJ3/4 / MBSPCT 3/8	3/4'	19,05	3/8'	16,66
JMMBSP0808	MJ3/4 / MBSPCT1/2	3/4'	19,05	1/2'	20,95
JMMBSP0810	MJ3/4 / MBSPCT5/8	3/4'	19,05	5/8'	22,91
JMMBSP0812	MJ3/4 / MBSPCT3/4	3/4'	19,05	3/4'	26,44
JMMBSP1002	MJ7/8 / MBSPCT1/8	7/8'	22,22	1/8'	9,72
JMMBSP1004	MJ7/8 / MBSPCT1/4	7/8'	22,22	1/4'	13,15
JMMBSP1006	MJ7/8 / MBSPCT3/8	7/8'	22,22	3/8'	16,66
JMMBSP1008	MJ7/8 / MBSPCT 1/2	7/8'	22,22	1/2'	20,95
JMMBSP1010	MJ7/8 / MBSPCT5/8	7/8'	22,22	5/8'	22,91
JMMBSP1012	MJ7/8 / MBSPCT3/4	7/8'	22,22	3/4'	26,44
JMMBSP1016	MJ7/8 / MBSPCT1"	7/8'	22,22	1"	33,24
JMMBSP1206	MJ1"1/16 / MBSPCT3/8	1"1/16'	26,98	3/8'	16,66
JMMBSP1208	MJ1"1/16 / MBSPCT1/2	1"1/16'	26,98	1/2'	20,95
JMMBSP1212	MJ1"1/16 / MBSPCT3/4	1"1/16'	26,98	3/4'	26,44
JMMBSP1216	MJ1"1/16 / MBSPCT1"	1"1/16'	26,98	1"	33,24
JMMBSP1220	MJ1"1/16 / MBSPCT1"1/4	1"1/16'	26,98	1"1/4'	41,91
JMMBSP1408	MJ1"3/16 / MBSPCT1/2	1"3/16'	30,1	1/2'	20,95
JMMBSP1412	MJ1"3/16 / MBSPCT3/4	1"3/16'	30,1	3/4'	26,44
JMMBSP1416	MJ1"3/16 / MBSPCT1"	1"3/16'	30,1	1"	33,24
JMMBSP1612	MJ1"5/16 / MBSPCT3/4	1"5/16'	33,33	3/4'	26,44
JMMBSP1616	MJ1"5/16 / MBSPCT1"	1"5/16'	33,33	1"	33,24
JMMBSP1620	MJ1"5/16 / MBSPCT1"1/4	1"5/16'	33,33	1"1/4'	41,91
JMMBSP2012	MJ1"5/8 / MBSPCT3/4	1"5/8'	41,27	3/4'	26,44
JMMBSP2016	MJ1"5/8 / MBSPCT1"	1"5/8'	41,27	1"	33,24
JMMBSP2020	MJ1"5/8 / MBSPCT1"1/4	1"5/8'	41,27	1"1/4'	41,91
JMMBSP2024	MJ1"5/8 / MBSPCT1"1/2	1"5/8'	41,27	1"1/2'	47,8
JMMBSP2420	MJ1"7/8 / MBSPCT1"1/4	1"7/8'	47,62	1"1/4'	41,91
JMMBSP2424	MJ1"7/8 / MBSPCT1"1/2	1"7/8'	47,62	1"1/2'	47,8
JMMBSP3224	MJ2"1/2 / MBSPCT1"1/2	2"1/2'	63,5	1"1/2'	47,8
JMMBSP3232	MJ2"1/2 / MBSPCT 2"	2"1/2'	63,5	2"	59,61

PRODUITS SIMILAIRES

Cet adaptateur existe également avec extrémité mâle BSP forme E, femelle tournant BSP, mâle gaz conique, femelle gaz cylindrique simple ou manomètre.