


EMBOUTS JIC DK

EMBOUT FEMELLE DROIT



DONNÉES TECHNIQUES

Filetage UNF - cône 74°

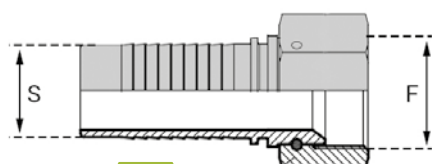

Ecrou à jonc

Référence	Désignation	S (int. tuyaux)			F	
		module	inch	mm	inch	mm
SFJIDK00304	S 04 FJIDK 7/16	3	3/16"	4,	7/16	9,71
SFJIDK00305	S 04 FJIDK 1/2	3	3/16"	4,8	1/2	11,12
SFJIDK00404	S 06 FJIDK 7/16	4	1/4"	6,35	7/16	9,71
SFJIDK00405	S 06 FJIDK 1/2	4	1/4"	6,35	1/2	11,12
SFJIDK00406	S 06 FJIDK 9/16	4	1/4"	6,35	9/16	12,76
SFJIDK00505	S 08 FJIDK 1/2	5	5/16"	8	1/2	11,12
SFJIDK00506	S 08 FJIDK 9/16	5	5/16"	8	9/16	12,76
SFJIDK00508	S 08 FJIDK 3/4	5	5/16"	8	3/4	17,33
SFJIDK00606	S 10 FJIDK 9/16	6	3/8"	9,5	9/16	12,76
SFJIDK00608	S 10 FJIDK 3/4	6	3/8"	9,5	3/4	17,33
SFJIDK00610	S 10 FJIDK 7/8	6	3/8"	9,5	7/8	20,26
SFJIDK00808	S 13 FJIDK 3/4	8	1/2"	12,7	3/4	17,33
SFJIDK00810	S 13 FJIDK 7/8	8	1/2"	12,7	7/8	20,26
SFJIDK00812	S 13 FJIDK 1"1/16	8	1/2"	12,7	1"1/16	24,69
SFJIDK01010	S 16 FJIDK 7/8	10	5/8"	15,9	7/8	20,26
SFJIDK01012	S 16 FJIDK 1"1/16	10	5/8"	15,9	1"1/16	24,69
SFJIDK01210	S 19 FJIDK 7/8	12	3/4"	19	7/8	20,26
SFJIDK01212	S 19 FJIDK 1"1/16	12	3/4"	19	1"1/16	24,69
SFJIDK01216	S 19 FJIDK 1"5/16	12	3/4"	19	1"5/16	31,04
SFJIDK01612	S 25 FJIDK 1"1/16	16	1"	25,4	1"1/16	24,69
SFJIDK01616	S 25 FJIDK 1"5/16	16	1"	25,4	1"5/16	31,04
SFJIDK01620	S 25 FJIDK 1"5/8	16	1"	25,4	1"5/8	38,98
SFJIDK02020	S 32 FJIDK 1"5/8	20	1"1/4	31,8	1"5/8	38,98
SFJIDK02024	S 32 FJIDK 1"7/8	20	1"1/4	31,8	1"7/8	45,33
SFJIDK02424	S 38 FJIDK 1"7/8	24	1"1/2	38,1	1"7/8	45,33
SFJIDK02432	S 38 FJIDK 2"1/2	24	1"1/2	38,1	2"1/2	61,2
SFJIDK03232	S 50 FJIDK 2"1/2	32	2"	50,8	2"1/2	61,2

PRODUITS SIMILAIRES

Cet embout existe également en femelle coudé 45°, 90° et 90° courbe haute.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)