

EMBOUTS INTERLOCK


BSPP

EMBOUT FEMELLE DROIT



DONNÉES TECHNIQUES

Filetage whitworth - Cône 60°

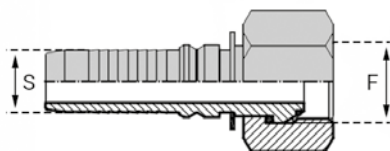

Référence	Désignation	S (int. tuyaux)			Dimensions			
		module	inch	mm	filetage	F/p	pas	D.I
IFBSP00808	IN 13 FBSP 1/2 DKO	8	1/2"	12,7	1/2-(15X21)	14	1,814	18,63
IFBSP01212	IN 19 FBSP 3/4 DKO	12	3/4"	19	3/4-(21X27)	14	1,814	24,12
IFBSP01616	IN 25 FBSP 1" DKO	16	1"	25,4	1"-(26X34)	11	2,309	30,29
IFBSP01620	IN 25 FBSP 1"1/4 DKO	16	1"	25,4	1"1/4-(33X42)	11	2,309	38,95
IFBSP02020	IN 32 FBSP 1"1/4 DKO	20	1"1/4	31,8	1"1/4-(33X42)	11	2,309	38,95
IFBSP02424	IN 38 FBSP 1"1/2 DKO	24	1"1/2	38,1	1"1/2-(40X49)	11	2,309	44,84
IFBSP03232	IN 50 FBSP 2" DKO	32	2"	50,8	2"-(50X60)	11	2,309	56,65

PRODUITS SIMILAIRES

Cet embout existe également en mâle droit ou femelle coudé 45° et 90°.