

EMBOUTS INTERLOCK JIC


EMBOUT FEMELLE COUDE 90° COURBE HAUTE



DONNÉES TECHNIQUES

Référence	Désignation	S (int. tuyaux)			Dimensions			
		module	inch	mm	filetage	F/p	pas	D.I
IFJI901212.H094	IN 19 FJI 1"1/16 90 DKJ - H94,5MM	12	3/4"	19	1"1/16	12	2,116	24,69
IFJI901616.H110	IN 25 FJI 1"5/16 90 DKJ - H110MM	16	1"	25,4	1"5/16	12	2,116	31,04
IFJI901620.H116	IN 25 FJI 1"5/8 90 DKJ - H116MM	16	1"	25,4	1"5/8	12	2,116	38,98
IFJI902020.H136	IN 32 FJI 1"5/8 90 DKJ - H136MM	20	1"1/4	31,8	1"5/8	12	2,116	38,98
IFJI902424.H162	IN 38 FJI 1"7/8 90 DKJ - H162MM	24	1"1/2	38,1	1"7/8	12	2,116	45,33
IFJI903232.H220	IN 50 FJI 2"1/2 90 DKJ - H220MM	32	2"	50,8	2"1/2	12	2,116	61,2

Filetage UNF - cône 74°

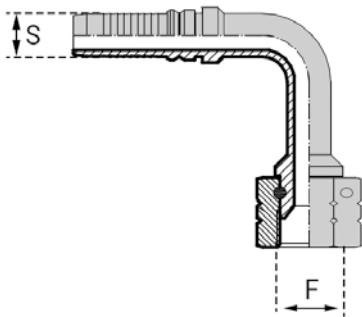

PRODUITS SIMILAIRES

Cet embout existe également en mâle droit et femelle droit ou coudé 45° et 90°.