


EMBOUTS JIC DK

EMBOUT FEMELLE COUDÉ 45°



DONNÉES TECHNIQUES

Filetage UNF - cône 74°

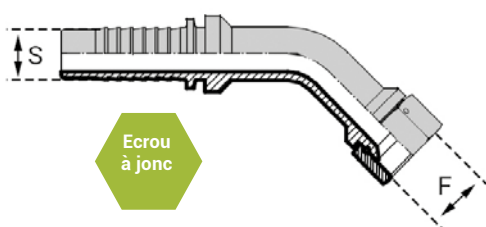

Référence	Désignation	S (int. tuyaux)			F	
		module	inch	mm	inch	mm
SFJIDK40304	S 04 FJIDK 7/16 45	3	3/16"	4,8	7/16	9,71
SFJIDK40305	S 04 FJIDK 1/2 45	3	3/16"	4,8	1/2	11,12
SFJIDK40404	S 06 FJIDK 7/16 45	4	1/4"	6,35	7/16	9,71
SFJIDK40405	S 06 FJIDK 1/2 45	4	1/4"	6,35	1/2	11,12
SFJIDK40406	S 06 FJIDK 9/16 45	4	1/4"	6,35	9/16	12,76
SFJIDK40505	S 08 FJIDK 1/2 45	5	5/16"	8	1/2	11,12
SFJIDK40506	S 08 FJIDK 9/16 45	5	5/16"	8	9/16	12,76
SFJIDK40508	S 08 FJIDK 3/4 45	5	5/16"	8	3/4	17,33
SFJIDK40606	S 10 FJIDK 9/16 45	6	3/8"	9,5	9/16	12,76
SFJIDK40608	S 10 FJIDK 3/4 45	6	3/8"	9,5	3/4	17,33
SFJIDK40610	S 10 FJIDK 7/8 45	6	3/8"	9,5	7/8	20,26
SFJIDK40808	S 13 FJIDK 3/4 45	8	1/2"	12,7	3/4	17,33
SFJIDK40810	S 13 FJIDK 7/8 45	8	1/2"	12,7	7/8	20,26
SFJIDK40812	S 13 FJIDK 1*1/16 45	8	1/2"	12,7	1*1/16	24,69
SFJIDK41010	S 16 FJIDK 7/8 45	10	5/8"	15,9	7/8	20,26
SFJIDK41012	S 16 FJIDK 1*1/16 45	10	5/8"	15,9	1*1/16	24,69
SFJIDK41210	S 19 FJIDK 7/8 45	12	3/4"	19	7/8	20,26
SFJIDK41212	S 19 FJIDK 1*1/16 45	12	3/4"	19	1*1/16	24,69
SFJIDK41216	S 19 FJIDK 1*5/16 45	12	3/4"	19	1*5/16	31,04
SFJIDK41612	S 25 FJIDK 1*1/16 45	16	1"	25,4	1*1/16	24,69
SFJIDK41616	S 25 FJIDK 1*5/16 45	16	1"	25,4	1*5/16	31,04
SFJIDK41620	S 25 FJIDK 1*5/8 45	16	1"	25,4	1*5/8	38,98
SFJIDK42020	S 32 FJIDK 1*5/8 45	20	1*1/4	31,8	1*5/8	38,98
SFJIDK42024	S 32 FJIDK 1*7/8 45	20	1*1/4	31,8	1*7/8	45,33
SFJIDK42424	S 38 FJIDK 1*7/8 45	24	1*1/2	38,1	1*7/8	45,33
SFJIDK42432	S 38 FJIDK 2*1/2 45	24	1*1/2	38,1	2*1/2	61,2
SFJIDK43232	S 50 FJIDK 2*1/2 45	32	2"	50,8	2*1/2	61,2

PRODUITS SIMILAIRES

Cet embout existe également en femelle droit ou coudé 90° et 90° courbe haute.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)