


EMBOUTS JIC DK

EMBOUT FEMELLE COUDÉ 90°



DONNÉES TECHNIQUES

Filetage UNF - cône 74°

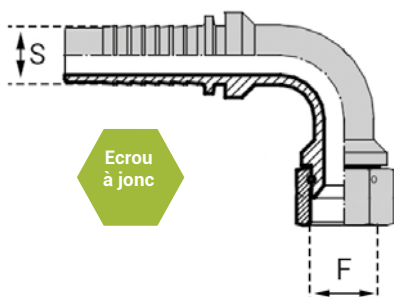

Référence	Désignation	S (int. tuyaux)			F	
		module	inch	mm	inch	mm
SFJIDK90304	S 04 FJIDK 7/16 90	3	3/16"	4,8	7/16	9,71
SFJIDK90305	S 04 FJIDK 1/2 90	3	3/16"	4,8	1/2	11,12
SFJIDK90404	S 06 FJIDK 7/16 90	4	1/4"	6,35	7/16	9,71
SFJIDK90405	S 06 FJIDK 1/2 90	4	1/4"	6,35	1/2	11,12
SFJIDK90406	S 06 FJIDK 9/16 90	4	1/4"	6,35	9/16	12,76
SFJIDK90505	S 08 FJIDK 1/2 90	5	5/16"	8	1/2	11,12
SFJIDK90506	S 08 FJIDK 9/16 90	5	5/16"	8	9/16	12,76
SFJIDK90508	S 08 FJIDK 3/4 90	5	5/16"	8	3/4	17,33
SFJIDK90606	S 10 FJIDK 9/16 90	6	3/8"	9,5	9/16	12,76
SFJIDK90608	S 10 FJIDK 3/4 90	6	3/8"	9,5	3/4	17,33
SFJIDK90610	S 10 FJIDK 7/8 90	6	3/8"	9,5	7/8	20,26
SFJIDK90808	S 13 FJIDK 3/4 90	8	1/2"	12,7	3/4	17,33
SFJIDK90810	S 13 FJIDK 7/8 90	8	1/2"	12,7	7/8	20,26
SFJIDK90812	S 13 FJIDK 1*1/16 90	8	1/2"	12,7	1*1/16	24,69
SFJIDK91010	S 16 FJIDK 7/8 90	10	5/8"	15,9	7/8	20,26
SFJIDK91012	S 16 FJIDK 1*1/16 90	10	5/8"	15,9	1*1/16	24,69
SFJIDK91210	S 19 FJIDK 7/8 90	12	3/4"	19	7/8	20,26
SFJIDK91212	S 19 FJIDK 1*1/16 90	12	3/4"	19	1*1/16	24,69
SFJIDK91216	S 19 FJIDK 1*5/16 90	12	3/4"	19	1*5/16	31,04
SFJIDK91612	S 25 FJIDK 1*1/16 90	16	1"	25,4	1*1/16	24,69
SFJIDK91616	S 25 FJIDK 1*5/16 90	16	1"	25,4	1*5/16	31,04
SFJIDK91620	S 25 FJIDK 1*5/8 90	16	1"	25,4	1*5/8	38,98
SFJIDK92020	S 32 FJIDK 1*5/8 90	20	1*1/4	31,8	1*5/8	38,98
SFJIDK92024	S 32 FJIDK 1*7/8 90	20	1*1/4	31,8	1*7/8	45,33
SFJIDK92424	S 38 FJIDK 1*7/8 90	24	1*1/2	38,1	1*7/8	45,33
SFJIDK92432	S 38 FJIDK 2*1/2 90	24	1*1/2	38,1	2*1/2	61,2
SFJIDK93232	S 50 FJIDK 2*1/2 90	32	2"	50,8	2*1/2	61,2

PRODUITS SIMILAIRES

Cet embout existe également en femelle droit ou coudé 45° et 90° courbe haute.

www.isoflex.fr

Tel : +33(0)2 41 39 98 98 - contact@isoflex.fr

ANGERS (49) - LOUDEAC (22) - NANTES (44) - CAEN (14) - AVIGNON (84) - ORLÉANS (45)