


# EMBOUTS JIC

## EMBOUT FEMELLE DROIT



### DONNÉES TECHNIQUES

Filetage UNF - cône 74°

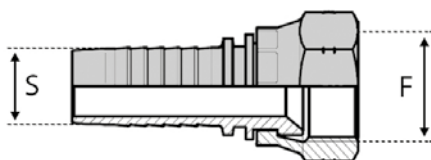

Référence	Désignation	S ( int. tuyaux)			F	
		module	inch	mm	inch	mm
SFJI000304	S 04 FJI 7/16	3	3/16"	4,8	7/16	9,71
SFJI000305	S 04 FJI 1/2	3	3/16"	4,8	1/2	11,12
SFJI000404	S 06 FJI 7/16	4	1/4"	6,35	7/16	9,71
SFJI000405	S 06 FJI 1/2	4	1/4"	6,35	1/2	11,12
SFJI000406	S 06 FJI 9/16	4	1/4"	6,35	9/16	12,76
SFJI000505	S 08 FJI 1/2	5	5/16"	8	1/2	11,12
SFJI000506	S 08 FJI 9/16	5	5/16"	8	9/16	12,76
SFJI000507	S 08 FJI 5/8	5	5/16"	8	5/8	14,39
SFJI000508	S 08 FJI 3/4	5	5/16"	8	3/4	17,33
SFJI000606	S 10 FJI 9/16	6	3/8"	9,5	9/16	12,76
SFJI000607	S 10 FJI 5/8	6	3/8"	9,5	5/8	14,39
SFJI000608	S 10 FJI 3/4	6	3/8"	9,5	3/4	17,33
SFJI000610	S 10 FJI 7/8	6	3/8"	9,5	7/8	20,26
SFJI000808	S 13 FJI 3/4	8	1/2"	12,7	3/4	17,33
SFJI000810	S 13 FJI 7/8	8	1/2"	12,7	7/8	20,26
SFJI000812	S 13 FJI 1*1/16	8	1/2"	12,7	1*1/16	24,69
SFJI001010	S 16 FJI 7/8	10	5/8"	15,9	7/8	20,26
SFJI001012	S 16 FJI 1*1/16	10	5/8"	15,9	1*1/16	24,69
SFJI001210	S 19 FJI 7/8	12	3/4"	19	7/8	20,26
SFJI001212	S 19 FJI 1*1/16	12	3/4"	19	1*1/16	24,69
SFJI001214	S 19 FJI 1*3/16	12	3/4"	19	1*3/16	27,87
SFJI001216	S 19 FJI 1*5/16	12	3/4"	19	1*5/16	31,04
SFJI001612	S 25 FJI 1*1/16	16	1"	25,4	1*1/16	24,69
SFJI001614	S 25 FJI 1*3/16	16	1"	25,4	1*3/16	27,87
SFJI001616	S 25 FJI 1*5/16	16	1"	25,4	1*5/16	31,04
SFJI001620	S 25 FJI 1*5/8	16	1"	25,4	1*5/8	38,98
SFJI002020	S 32 FJI 1*5/8	20	1*1/4	31,8	1*5/8	38,98
SFJI002024	S 32 FJI 1*7/8	20	1*1/4	31,8	1*7/8	45,33
SFJI002424	S 38 FJI 1*7/8	24	1*1/2	38,1	1*7/8	45,33
SFJI003232	S 50 FJI 2*1/2	32	2"	50,8	2*1/2	61,2

### PRODUITS SIMILAIRES

Cet embout existe également en mâle droit ou femelle coudé 45°, 90°, 90° courbe haute ou compact.